



SmarterGlass

state-of-the-art display solutions

www.smarterglass.com
978 997 4104
sales@smarterglass.com

LQ064V1DS11

Color TFT-LCD Module
(LCD TV/Digital still camera)

Features

- 16 cm [6.4"] display size
- Built-in DC/AC converter for backlight drive


Specifications

Parameter		Unit
Display size	16 [6.4]	cm ["]
No. of pixels	307 200	pixel
Dot format (H x V)	640 x RGB x 480	dot
Dot pitch (H x V)	0.068 x 0.202	mm
Active area (H x V)	130.6 x 97.0	mm
Input signal system	Digital RGB	-
Input video signal	6-bit digital	-
Viewing direction	6:00	-

Parameter		Unit
Backlight type	1CCFT(D)	-
Brightness	300	cd/m ²
Power consumption	3.4	W
Outline dimensions (W x H x D)	178.8 x 126.8 x 12.0	mm
Weight	290	g
Operating temperature	0 to +55	°C
Storage temperature	-25 to +70	°C

Outline Dimensions

unit : mm

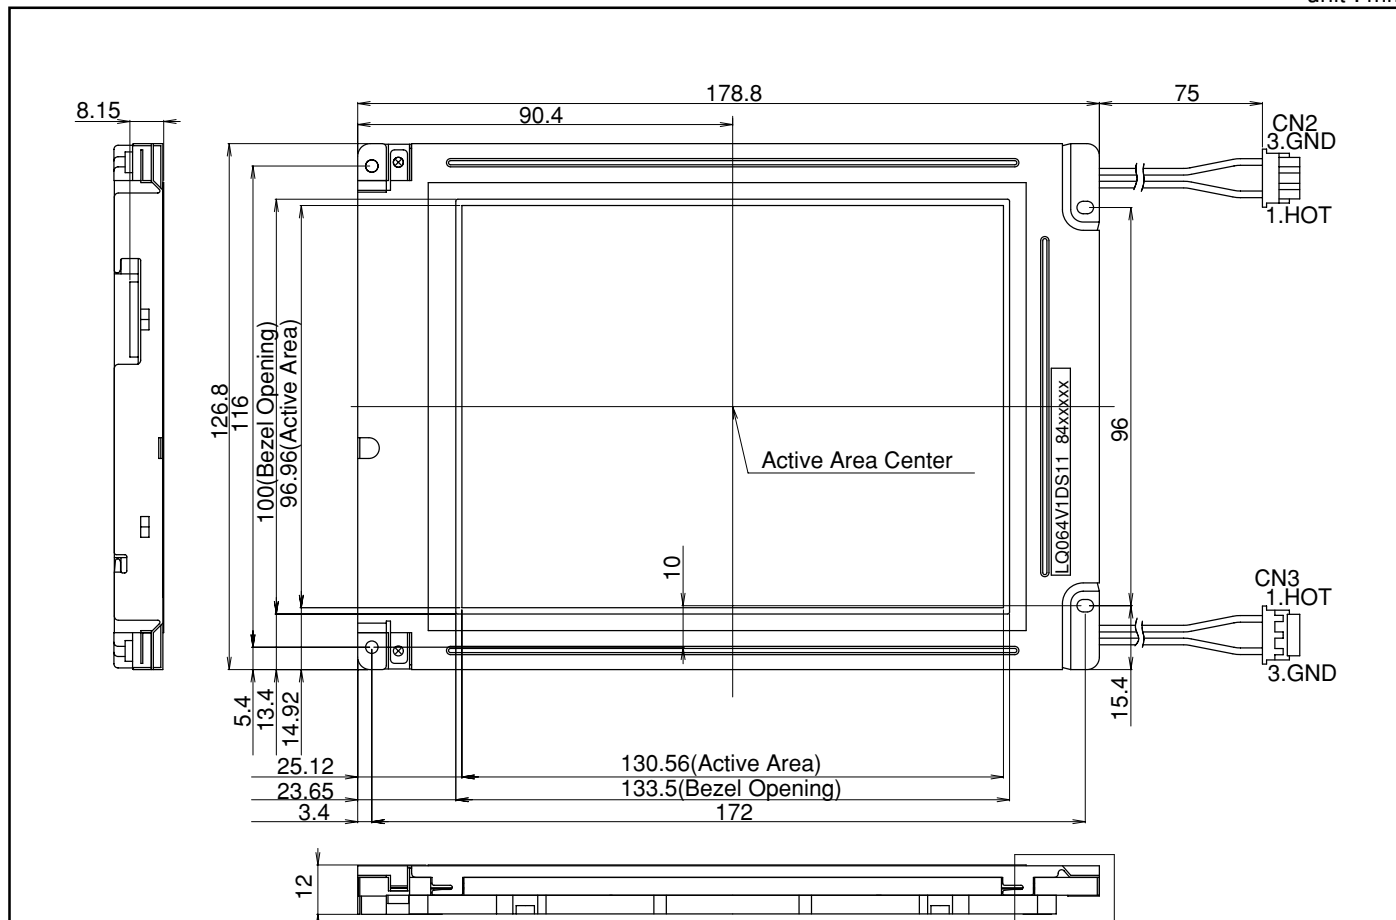

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.